

WALL WASHER DOWNLIGHT

WDW-1 series



WDW-1RF




WDW-1RL



WDW-1QF



WDW-1QL

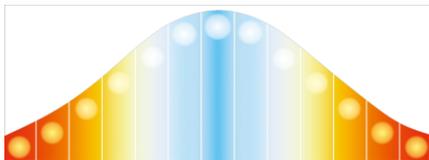

Circadian Lighting

+



Tunable White

Products produced by  
Circadian Lighting Limited  
[www.circaman.cc](http://www.circaman.cc)

## WDW series



WDW-1RF



WDW-1RL



WDW-1QF



WDW-1QL

## FEATURES 產品特點

- Circadian rhythm of light 2800K - 5700K during different time
- Dual Colours - Single point source LED
- Available in 5W – 20W for 25W – 100W halogen equivalent
- Tunable white and dimmable to 5%
- Selectable CCT - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- Transformer 100-240V 50/60Hz input (Sold separately)
- Android apps or optional 2.4GHz Wireless Remote Control
- Honeycomb louver accessory available
- 不同時間的晝夜節律燈光2800K - 5700K
- 雙色 - 單點光源 LED
- 5W – 20W燈具電源可選 · 相當於 25W – 100W 鹵素燈
- 可調白光及可調光至 5%
- 可選色溫 - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- 變壓器 100-240V 50/60Hz 輸入 ( 單獨出售 )
- Android 應用程序或可選的 2.4GHz 無線遙控器
- 可提供蜂窩板配件

## APPLICATIONS 應用

- Display, Hotel, Office, Residential, Restaurant, Retail, Speciality
- 展示、酒店、辦公室、住宅、餐廳、零售、其他

## PRODUCT INFORMATION 產品資料

Colour temp.:	2800K – 5700K
色溫:	
CRI :	90 (Typ.) CRI 80 and 95 on request
顯色指數:	
Color Consistency:	3 Steps MacAdam @2800K and @5700K
顏色一致性:	
Selectable CCT:	2800K / 3000K / 3500K / 4000K / 4500K / 5000K / 5700K
可選 CCT :	
Brightness Setting:	100% / 75% / 50% / 25% / 10% / 5%
亮度設置:	
Beam Angle:	15° / 24° / 38° / 60°
光束角:	

Mode: A-Mode (Auto - CCT changing – Constant power 自動 - 色溫變化 - 恆定功率)

模式: C-Mode (Circadian Rhythm - CCT-brightness changing 晝夜節律 - 色溫亮度變化)

\*CCT selection and Dimming functions by remote control or Android Apps  
通過遙控器或 Android 應用程序選擇 CCT 和調光功能

\*\*For informational purposes only. Content is subject to change  
僅供參考。內容可能會需要更改。

## WDW-1RF / 1RL / 1QF / 1QL series



WDW-1RF



WDW-1RL



WDW-1QF



WDW-1QL

Model No. 型號	Ceiling cut-out (mm) 開孔尺寸	Outer flange (mm) 外尺寸	Height (mm) 高度	Max. wattage (W) 最大瓦數	Lumen output (lm)* 輸出流明
WDW55-1RF	Ø55	Ø61.6	88	5W	307 - 360 lm
WDW75-1RF	Ø75	Ø84	112	10W	500 - 590 lm
WDW95-1RF	Ø95	Ø110	138	20W	1130 - 1320 lm
WDW55-1RL	Ø57.5	N/A	88	5W	307 - 360 lm
WDW75-1RL	Ø77	N/A	112	10W	500 - 590 lm
WDW95-1RL	Ø97	N/A	138	20W	1130 - 1320 lm
WDW55-1QF	Ø55	Ø61.6	80	5W	307 - 360 lm
WDW75-1QF	Ø75	Ø84	101	10W	500 - 590 lm
WDW95-1QF	Ø95	Ø110	122	20W	1130 - 1320 lm
WDW55-1QL	Ø57.5	N/A	80	5W	307 - 360 lm
WDW75-1QL	Ø77	N/A	101	10W	500 - 590 lm
WDW95-1QL	Ø97	N/A	122	20W	1130 - 1320 lm

### ORDERING INFORMATION 訂購信息

Example Model 示例: WDW95-WT-SS-38D-928-957-1RF

LED Light-Engine Information 光引擎訂購信息							Mounting Information 安裝支架				
WDW	95	-	WT	-	WT	-	38D	-	928 - 957	-	1RF
Series 系列	Light Engine 光引擎	-	Body colour 鋁殼顏色	-	Reflector colour 反光罩顏色	-	Beam angle 光束角	-	CCT range 相對色溫範圍	-	Mounting Type 安裝支架
WDW	55 (Max. 5W) 75 (Max. 10W) 95 (Max. 20W)		WT White 白色		WT White 啞白 BK Black 啞黑 GB Gun Black 槍黑 SS Specular Silver 鏡面銀 GD Golden 金色		15D (15°) 24D (24°) 38D (38°) 60D (60°)		928 - 957 2800K - 5700K@90 CRI *(CRI 80 / 95 on request)		1RF (1 light-engine, rounded mounting with flange 單光引擎,圓形帶法蘭安裝支架) 1RL (1 light-engine, rounded mounting with flangeless 單光引擎,圓形無邊安裝 支架) 1QF (1 light-engine, square mounting with flange 單光引擎,方形帶法蘭安裝支架) 1QL (1 light-engine, square flangeless mounting 單光引擎,方形無邊安裝支架)

\*For informational purposes only. Content is subject to change.  
僅供參考。內容可能會更改。

\*PSU is sold separately 電源單獨訂購