

## PRODUCT DESCRIPTION

### CIRCAMAN™ – GDT Series – Recessed Downlight



#### FEATURES

- Circadian Rhythm of Light 2800K - 5700K during different time
- Dual Colours - Single Point source LED
- Available in 5W – 30W for 25W – 150W halogen equivalent
- Available multi-beam angle selection 15°/23°/38°/60°
- Selectable CCT - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- Dimmable to 5%
- Tunable White with Narrow Beam Angle
- Transformer 100-240V 50/60Hz input (Sold separately)
- Android Apps or Optional 2.4GHz Wireless Remote Control

#### APPLICATIONS

- Display, Hotel, Office, Residential, Restaurant, Retail, Speciality

#### BENEFITS

- Productivity and concentration improvements
- Improved mood
- Increased customer satisfactory and well-being
- Boost customer dwell time and sale

#### GENERAL SPECIFICATIONS

Working Voltage –	36V (Typ.) DC input (Light Engine)		
Light Engine	Need to match with our transformer (PSU)		
Working Voltage –	100 – 240 VAC 50/60Hz	Switching	50000x
Transformer (Sold separately)			
Halogen Equivalent	5W – 25W Halogen	Power	Depend on transformer output
(Depend on Transformer)	10W – 50W Halogen		
	15W – 75W Halogen		
	20W – 100W Halogen		
	30W – 150W Halogen		
Operation Temp.	Max. operation temp.		
70°C to 80°C @ Case Temperature	90°C @ Case Temperature		
EU RoHS compliant	YES	Lifetime	35000 hrs – 50000 hrs (nom.)

#### PRODUCT INFORMATION

Colour temp.	2800K – 5700K		
CRI	90 (Typ.) CRI 80 and 95 on request		
Color Consistency	3 Steps MacAdam @2800K and @5700K		
Selectable CCT:	2800K / 3000K / 3500K / 4000K / 4500K / 5000K / 5700K		
Brightness Setting:	100% / 75% / 50% / 25% / 10% / 5%		
Beam Angle	15° / 23° / 38° / Square / Oval		
Mode: A-Mode (Auto - CCT changing – Constant power)			
C-Mode (Circadian Rhythm - CCT-brightness changing for HCL)			

\*CCT selection and Dimming functions by remote control or Android Apps

Lumen output with different wattage PSU (Power supply unit)

Model	5W	10W	15W	20W	30W	40W
GDT125	320 – 374 lm	621 – 727 lm	875 – 1024 lm	1092 – 1277 lm	N.A.	N.A.
GDT150	333 – 389 lm	640 – 749 lm	932 – 1090 lm	1197 – 1401 lm	1638 – 1916 lm	N.A.

\*Lumen output at CCT2800K – CCT5700K. Data for reference only.

## DIMENSIONS




Model	Max. Wattage	C - Ceiling Cut-out (mm)	D - Flange Diameter (mm)	H - Height, (mm)
GDT125	Max. 20W	Ø125 - 130	Ø138	90
GDT150	Max. 30W	Ø150 - 155	Ø165	100

## OGDTRING INFORMATION

Example: GDT75-WT-SS-15D-928-957

GDT	75	-	WT	-	SS	-	15D	-	928 - 957
Series	Ceiling Cut-out Diameter	-	Body Colour	-	Reflector Colour	-	Beam Angle	-	Min. CCT – Max. CCT
GDT	125 125-130mm (Max. 15W) 150 150-155mm (Max. 30W)		WT White BK Black		WT White BK Black SS Specular Silver		15D For 15° 23D For 23° 38D For 38° 60D For 60°		928 – 957 2800K – 5700K@90 CRI *(CRI 80 / 95 on request)

## AUTO CCT AND BRIGHTNESS CHANGING

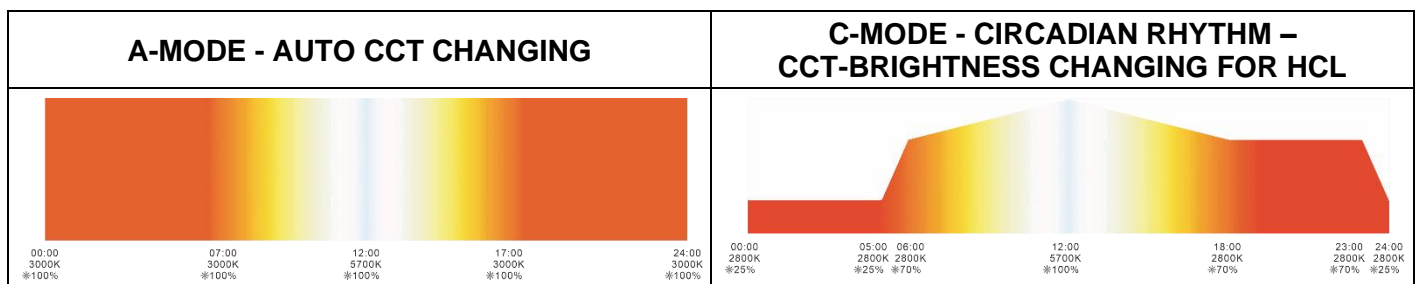

Circadian Lighting Limited

[contact@circadian-lighting.com](mailto:contact@circadian-lighting.com)  
[www.circaman.cc](http://www.circaman.cc)

© 2021 Circadian Lighting Limited. All rights reserved.  
 For informational purposes only. Content is subject to change.