

GIMBAL DOWNLIGHT (EXTENDABLE)


GDV-3 / GDV-4 series



GDV-3RF




GDV-3RL

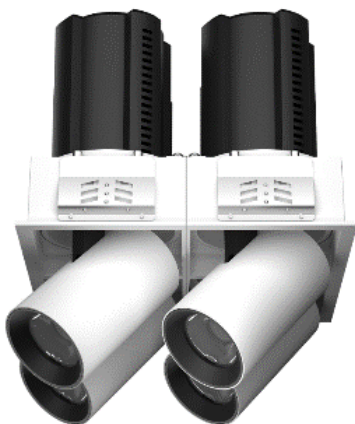

GDV-4QF



GDV-4QL

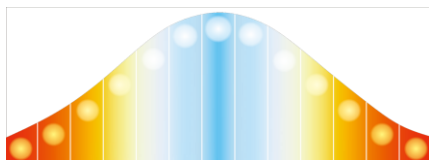

Circadian Lighting

+



Tunable White

Products produced by  
Circadian Lighting Limited  
[www.circaman.cc](http://www.circaman.cc)

## GDV series

### FEATURES 產品特點

- Circadian rhythm of light 2800K - 5700K during different time
- Dual Colours - Single point source LED
- Available in 5W – 20W for 25W – 100W halogen equivalent
- Tunable white and dimmable to 5%
- Selectable CCT - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- Transformer 100-240V 50/60Hz input (Sold separately)
- Android apps or optional 2.4GHz Wireless Remote Control
- Honeycomb louver accessory available
- 不同時間的晝夜節律燈光2800K - 5700K
- 雙色 - 單點光源 LED
- 5W – 20W燈具電源可選 · 相當於 25W – 100W 鹵素燈
- 可調白光及可調光至 5%
- 可選色溫 - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- 變壓器 100-240V 50/60Hz 輸入 ( 單獨出售 )
- Android 應用程式或可選的 2.4GHz 無線遙控器
- 可提供蜂窩板配件



GDV-3QF



GDV-3QL



GDV-4QF



GDV-4QL

### APPLICATIONS 應用

- Display, Hotel, Office, Residential, Restaurant, Retail, Speciality
- 展示、酒店、辦公室、住宅、餐廳、零售、其他

### PRODUCT INFORMATION 產品資料

Colour temp.:

2800K – 5700K

色溫:

CRI:

90 (Typ.) CRI 80 and 95 on request

顯色指數:

Color Consistency:

3 Steps MacAdam @2800K and @5700K

顏色一致性:

Selectable CCT:

2800K / 3000K / 3500K / 4000K / 4500K / 5000K / 5700K

可選 CCT :

Brightness Setting:

100% / 75% / 50% / 25% / 10% / 5%

亮度設置:

Beam Angle:

15° / 24° / 38° / 60°

光束角:

Mode: A-Mode (Auto - CCT changing – Constant power 自動 - 色溫變化 - 恆定功率)

模式: C-Mode (Circadian Rhythm - CCT-brightness changing 晝夜節律 - 色溫亮度變化)

\*CCT selection and Dimming functions by remote control or Android Apps  
通過遙控器或 Android 應用程式選擇 CCT 和調光功能

\*\*For informational purposes only. Content is subject to change  
僅供參考。內容可能會需要更改。

## GDV-3QF / 3QL / 4QF / 4QL series



GDV-3QF



GDV-3QL



GDV-4QF



GDV-4QL

Model No. 型號	Ceiling cut-out (mm) 開孔尺寸	Outer flange (mm) 外尺寸	Height (mm) 高度	Max. wattage (W) 最大瓦數	Lumen output (lm)* 輸出流明
GDV55-3QF	163 x 55	171 x 63.5	94	3 x 5W	921 - 1080 lm
GDV75-3QF	222 x 75	231.5 x 84.5	116	3 x 10W	1500 - 1770 lm
GDV95-3QF	284 x 95	293.5 x 104.5	144	3 x 20W	3390 - 3960 lm
GDV55-3QL	165.5 x 57.5	N/A	94	3 x 5W	921 - 1080 lm
GDV75-3QL	224.5 x 77	N/A	116	3 x 10W	1500 - 1770 lm
GDV95-3QL	287 x 97	N/A	144	3 x 20W	3390 - 3960 lm
GDV55-4QF	□108.5	□116	94	4 x 5W	1228 - 1440 lm
GDV75-4QF	□150	□158	116	4 x 10W	2000 - 2360 lm
GDV95-4QF	□190	□198	144	4 x 20W	4520 - 5280 lm
GDV55-4QL	□111	N/A	94	4x 5W	1228 - 1440 lm
GDV75-4QL	□152.5	N/A	116	4 x 10W	2000 - 2360 lm
GDV95-4QL	□192	N/A	144	4 x 20W	4520 - 5280 lm

### ORDERING INFORMATION 訂購信息

Example Model 示例: GDS95-WT-WT-38D-928-957-3RF

LED Light-Engine Information 光引擎訂購信息							Mounting Information 安裝支架				
GDV	95	-	WT	-	WT	-	38D	-	928 - 957	-	3RF
Series 系列	Light Engine 光引擎	-	Body colour 鋁殼顏色	-	Reflector colour 反光罩顏色	-	Beam angle 光束角	-	CCT range 相對色溫範圍	-	Mounting Type 安裝支架
GDV	55 (Max. 5W) 75 (Max. 10W) 95 (Max. 20W)		WT White 白色		WT White 白色		15D (15°) 24D (24°) 38D (38°) 60D (60°)		928 - 957 2800K - 5700K@90 CRI *(CRI 80 / 95 on request)		3QF (3 light-engines, rounded mounting with flange 三光引擎,長方形帶法蘭安裝支架)  3QL (3 light-engine, rounded mounting with flangeless 三光引擎,長方形無邊安裝 支架)  4QF (4 light-engines, rounded mounting with flange 四光引擎, 方形帶法蘭安裝支架)  4QL (4 light-engine, rounded mounting with flangeless 四光引擎, 方形無邊安裝 支架)

\*For informational purposes only. Content is subject to change.  
僅供參考。內容可能會更改。

\*PSU is sold separately 電源單獨訂購