


WALL WASHER DOWN LIGHT

WDT series

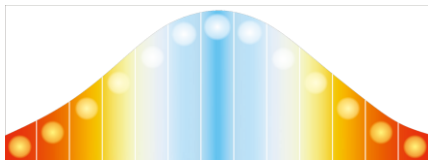

Circadian Lighting

+



Tunable White

Products produced by
Circadian Lighting Limited
www.circaman.cc

WDT series



FEATURES 產品特點

- Circadian rhythm of Light 2800K - 5700K during different time
- Dual colours - Single point source LED
- Available in 5W – 30W for 25W – 150W halogen equivalent
- Tunable white and Dimmable to 5%
- Selectable CCT - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- Transformer 100-240V 50/60Hz input (Sold separately)
- Android apps or optional 2.4GHz wireless remote control
- Polarized light luminaire
- 不同時間的晝夜節律燈光2800K - 5700K
- 雙色 - 單點光源 LED
- 5W – 30W燈具電源可選 · 相當於 25W – 150W 鹵素燈
- 可調白光及可調光至 5%
- 可選色溫 - 2800K/3000K/3500K/4000K/4500K/5000K/5700K
- 變壓器 100-240V 50/60Hz 輸入 (單獨出售)
- Android 應用程序或可選的 2.4GHz 無線遙控器
- 偏光燈具

APPLICATIONS 應用

- Display, Hotel, Office, Residential, Restaurant, Retail, Speciality
- 展示、酒店、辦公室、住宅、餐廳、零售、其他

PRODUCT INFORMATION 產品資料

Colour temp.:	2800K – 5700K
色溫:	
CRI:	90 (Typ.) CRI 80 and 95 on request
顯色指數:	
Color Consistency:	3 Steps MacAdam @2800K and @5700K
顏色一致性:	
Selectable CCT:	2800K / 3000K / 3500K / 4000K / 4500K / 5000K / 5700K
可選 CCT :	
Brightness Setting:	100% / 75% / 50% / 25% / 10% / 5%
亮度設置:	
Beam Angle:	15° / 24° / 38° / 60° (All asymmetric 10°)
光束角:	
Mode: A-Mode (Auto - CCT changing – Constant power 自動 - 色溫變化 - 恆定功率)	
模式: C-Mode (Circadian Rhythm - CCT-brightness changing 晝夜節律 - 色溫亮度變化)	

*CCT selection and Dimming functions by remote control or Android Apps
通過遙控器或 Android 應用程序選擇 CCT 和調光功能

**For informational purposes only. Content is subject to change
僅供參考。內容可能會需要更改。

WDT series



Model No. 型號	Ceiling cut-out (mm) 開孔直徑	Outer diameter (mm) 外徑	Height (mm) 高度	Max. wattage (W) 最大瓦數	Lumen output (lm)* 輸出流明
WDT75	Ø75 - 80	Ø90	70	10W	502 – 588 lm
WDT95	Ø95 - 100	Ø108	85	20W	1092 – 1277 lm
WDT125	Ø125 - 130	Ø135	97	30W	1638 – 1916 lm

Lumen output with different wattage PSU (Power supply unit)
不同瓦數電源下的流明輸出

Model No. 型號	5W	10W	15W	20W	30W	40W
WDT75	286 – 334 lm	502 – 588 lm	N.A.	N.A.	N.A.	N.A.
WDT95	320 – 374 lm	621 – 727 lm	875 – 1024 lm	1092 – 1277 lm	N.A.	N.A.
WDT125	333 – 389 lm	640 – 749 lm	932 – 1090 lm	1197 – 1401 lm	1638 – 1916 lm	N.A.

*Lumen output at CCT2800K – CCT5700K. Data for reference only.

*CCT2800K – CCT5700K 下的流明輸出。數據僅供參考。

ORDERING INFORMATION 訂購資料

Example Model 示例: RDT95-WT-BK-38D-928-957

WDT	95	-	WT	-	SS	-	15D	-	928 - 957
Series 系列	Ceiling cut-out Diameter 開孔直徑	-	Body colour 鋁殼顏色	-	Reflector colour 反光罩顏色	-	Beam angle 光束角	-	CCT range 相對色溫範圍
WDT	75 Ø75-80mm (Max. 10W) 95 Ø95-100mm (Max. 20W) 125 Ø125-130mm (Max. 30W)		WT White 白色		SS Specular Silver 鏡面銀		15D (15°) 24D (24°) 38D (38°) 60D (60°) (All asymmetric 單偏 10°)		928 – 957 2800K – 5700K@90 CRI *(CRI 80 / 95 on request)

*For informational purposes only. Content is subject to change.
僅供參考。內容可能會更改。

**PSU is sold separately 電源單獨訂購